


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

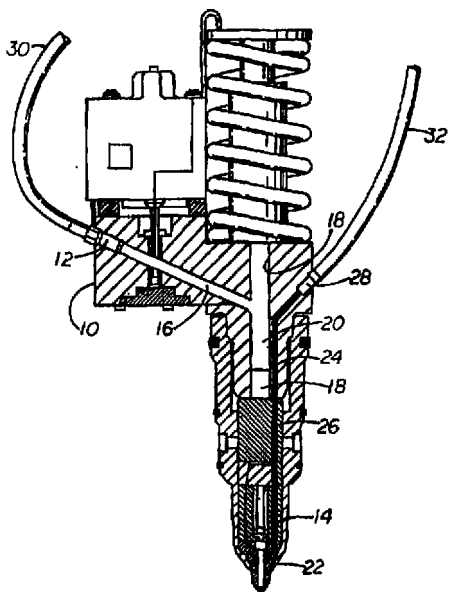

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>G01J 1/56, G01B 9/02</b>		<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/35210</b> <b>(43) International Publication Date:</b> 13 August 1998 (13.08.98)
<b>(21) International Application Number:</b> PCT/US97/01942 <b>(22) International Filing Date:</b> 6 February 1997 (06.02.97) <b>(71) Applicant (for all designated States except US):</b> OPTRAND, INC. [US/US]; 46155 Five Mile Road, Plymouth, MI 48170 (US). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> WLODARCZYK, Marek, T. [PL/US]; 6865 Vachon Drive, Bloomfield Hills, MI 48301 (US). POORMAN, Thomas, J. [US/US]; 1616 N. Hacker Road, Howell, MI 48843 (US). <b>(74) Agent:</b> DEIMEN, James, M.; Suite 300, 320 N. Main Street, Ann Arbor, MI 48104-1192 (US).		<b>(81) Designated States:</b> AU, BR, CA, JP, KR, PL, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>	
<b>(54) Title:</b> FUEL INJECTORS WITH INTEGRAL FIBER OPTIC PRESSURE SENSORS AND ASSOCIATED COMPENSATION AND STATUS MONITORING DEVICES			
<b>(57) Abstract</b> <p>Fuel injectors (10) for internal combustion engines are modified and equipped with fiber optic fuel pressure sensors (12) and fiber optic combustion pressure sensors (14). The combustion pressure sensors (14) are located in separate channels (26) formed in the fuel injectors with the lower portion (22) of the channels leading to the combustion chambers. Above the combustion pressure sensors (14) are fiber optic leads (24). In the preferred embodiments the sensors (46) are equipped with diaphragms (40) of novel shape (48) and employ multiple pairs of fibers (86, 88), temperature sensitive components (72, 74, 126) and novel compensation and status monitoring circuits (Figs. 6, 9, 10, 14, 15, 18).</p>			
			

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**FUEL INJECTORS WITH INTEGRAL FIBER OPTIC  
PRESSURE SENSORS AND ASSOCIATED COMPENSATION  
AND STATUS MONITORING DEVICES**

**Background of the Invention**

5           This application incorporates by reference application Serial No. 08/442,218, now U.S. Pat. 5,600,125, by the same inventors entitled Compensation and Status Monitoring Devices for Fiber Optic Intensity Modulated Sensors.

10           Four stroke direct-injection engines have been under recent intense development for both diesel and gasoline fuel applications due to significant fuel economy improvements and reduced emission levels in comparison to engines with conventional fuel injection. Direct injection diesel engines have a higher baseline thermal efficiency (about 40% peak), 20-35% better fuel efficiency, 10-20% lower CO<sub>2</sub> emissions, near-zero evaporative emissions, and  
15           low cold-start emissions. Fuel economy improvements of as much as 35% have been recently reported, combined with a simultaneous increase in engine power and torque of 10%, for a direct gasoline injection engine. Such remarkable performance has been realized through a combination of very lean burn combustion (Air-fuel ratios as high as 40:1) and stratified charge mixing  
20           inside each engine combustion chamber.

**Summary of the Invention**

          A key component that is required for both Direct Diesel Injected (DDI) and Direct Gasoline Injected (DGI) engines is an accurate and cost-effective fuel injector. In diesel engines, the new injection must operate at  
25           extremely high pressures (as high as 30,000 psi), provide accurate and repeatable spray patterns, and be precisely timed. In addition, such an injector must operate for as many as 0.5 million miles and be of low cost.

          In DGI applications, in particular, the very poor lubricating nature of gasoline and critical injector specifications make gasoline injectors difficult  
30           and expensive to manufacture.

          To provide the required performance, reliability, and low-cost for both DDI and DGI injectors, disclosed below are approaches based on closed loop control of injector operating parameters, where combustion chamber and fuel pressures are used as control parameters. As detailed below a preferred way

of obtaining these two pressures is to integrate two miniature fiber optic pressure sensors inside an injector. Such a "smart" injector does not need to be individually calibrated, as currently done, so its price can be significantly lower. Differences caused by manufacturing variability, aging, pressure line  
5 fluctuations, or fuel quality can be compensated for by using closed-loop control of fuel injection timing, duration and pressure. The combustion chamber pressure sensor of the smart injector provides, in addition, real-time information about cylinder pressure including peak pressure (PP), indicated mean effective pressure (IMEP), start of combustion (SOC) and location of peak  
10 pressure (LPP). When inputs from both fuel and combustion pressure sensors are used to control the injector, simultaneous benefits of reduced emissions, improved fuel economy, increased injector reliability, and reduced cost can be achieved.

#### Invention Overview

15 The fiber optic sensors utilized in the smart injector are of a novel construction aimed at high accuracy in a very small device exposed to extremely high pressures and temperatures. The sensor tip may be as small as 2.5mm in diameter or smaller. By using a specially shaped diaphragm in the sensor and two D-shaped optical fibers, high levels of optical modulation  
20 can be realized at small diaphragm deflections. Small diaphragm deflections are required to permit high diaphragm yield strength and long fatigue life. Using a two photodiode detection technique, each sensor's signal interface/conditioner can operate accurately over a temperature range of -50 to 150°C.

25 In a preferred configuration two types of sensors are used in the smart injector: (1) a high pressure sensor for monitoring static fuel pressures inside the injector and (2) a sensor for detecting dynamic combustion chamber pressures.

To compensate for changing sensor response with temperature, a  
30 temperature compensation technique utilizes a combination of a thin film deposited on the diaphragm inner surface and a temperature probe mounted in the sensor housing. The thin film reflection coefficient changes with temperature thereby compensating for any intra cycle (short term) diaphragm

temperature excursions above its average temperature. Any longer term errors, resulting from increased diaphragm deflection at higher average temperature and other thermal effects on the sensor head, are compensated for by adjusting the pressure sensor's gain, based on the temperature probe output.

5 While most direct injectors require dynamic fuel pressure information, only static pressures must be known in such approaches as fuel rails. Disclosed below is a static pressure sensor utilizing two optical fiber pairs, with one pair acting as a reference device to compensate for errors that may result from temperature effects on opto-electronic components, fiber bending,  
10 or other sources of undesirable light intensity fluctuations.

As above, to compensate for errors arising from intra-cycle diaphragm heating due to the nearby combustion gasses, the compensation technique is similar to the technique used for dynamic sensors. For the static sensor one pair of fibers is exposed to diaphragm deflection and the other pair of fibers  
15 is installed in front of a non-deflecting reflector coated with a reflection temperature dependent thin film. A separate temperature probe provides input information for additional compensation for sensor gain and offset changes arising from varying inter-cycle average diaphragm and housing temperatures.

#### **Brief Description of the Drawings**

20 FIG. 1 is a schematic cross-section view of a smart injector with both fuel pressure and combustion pressure sensors;

FIG. 2 is a schematic cross-section of a preferred fiber pair;

FIG. 3 is a schematic cross-section of a preferred sensor tip;

FIG. 4 is a schematic cross-section of the sensor tip of FIG. 3 under  
25 increased pressure;

FIG. 5 is a graphical comparison of the responses of the preferred sensor tip to a conventional flat diaphragm sensor tip;

FIG. 6 is a block diagram of the opto-electronic circuitry for a dynamic pressure sensor;

30 FIG. 7 is a schematic cross-section of a preferred sensor tip including a temperature dependent reflective thin film;

FIG. 8 is a schematic cross-section of the preferred sensor tip of FIG. 7 further including a temperature probe;

FIG. 9 is a block diagram of the opto-electronic circuitry for the sensor tip of FIG. 8 in a dynamic pressure setting;

FIG. 10 is a block diagram of the opto-electronic circuitry for the sensor tip of FIG. 8 in a static pressure setting;

5        FIG. 11 is a schematic cross-section of the preferred sensor tip incorporating separate dual fiber pairs of differing distances from the diaphragm;

FIG. 12 is a schematic cross-section of the preferred sensor tip with an alternate form of the dual fiber pairs of FIG. 11;

10       FIG. 13 is a graphical illustration of two fiber output versus distance from the sensor diaphragm;

FIG. 14 is a block diagram of the opto-electronic circuitry for the sensor tips of FIGs. 12 and 13;

15       FIG. 15 is a block diagram of alternative sum/difference error correction opto-electronic circuitry for the sensor tips of FIGs. 12 and 13;

FIG. 16 is a schematic cross-section of the preferred sensor tip having means to compensate for intra-cycle, thermal shock related errors;

20       FIG. 17 is a schematic cross-section of the preferred sensor tip further including means for compensation of longer term temperature changes in the sensor tip of FIG. 16; and

FIG. 18 is a block diagram of the opto-electronic circuitry for the sensor tip of FIG. 17.

#### **Description of the Preferred Embodiments**

25       In FIG. 1 the modified smart injector 10 is fitted with both a fuel pressure sensor 12 and a combustion pressure sensor 14. The fuel sensor 12 may be mounted in a modified existing injector opening 16 as shown. The opening 16 comprises a channel communicating with the axial fuel channel 18 of the injector 10. The sensor 12 may be approximately 5mm in diameter and threaded into the channel 16 whereby the sensor diaphragm is directly  
30       exposed to the fuel pressure in the channel and also the axial fuel channel 18 when the injector plunger 20 is retracted.

The combustion pressure sensor 14 is exposed to combustion chamber gases through a short channel 22. The fiber optic lead 24 for this

sensor 14 is located inside a 1mm diameter cylindrical hole 26 extending from the sensor 14 to the strain relief 28 attached to the injector 10 near the top of the injector.

Each of the sensors is connected to its own opto-electronic module or  
5 connector as further discussed below. The connections are by the fiber optic cables 30 and 32. The opto-electronic modules contain circuitry which in turn is connected to the engine Electronic Control Module (ECM). The ECM controls the injector timing, duration, and fuel line pressure in response to the output of the sensors 12 and 14 as well as other engine sensors and controls.

10 The preferred sensor design for the fuel and combustion pressure sensors above utilizes two or more optical fibers. These fibers are modified as illustrated in FIG. 2. Rather than using fibers with circular cross-sections, as is conventionally done in fiber optic pressure sensors for other purposes, the fibers are generally D-shaped on the outer surface as shown at 34 where  
15 the cladding 36 is substantially reduced in thickness. The multimode fibers are coupled by their flat surfaces 34 to minimize the distance between fiber cores 38.

The minimum distance between fiber cores 38 is highly desired for reduced sensor power loss and increased optical modulation, both resulting  
20 in improved sensor resolution, signal to noise ratio and output accuracy. In a typical configuration the fibers have core 38 diameters of 140 microns, cladding 36 of 170 microns and flat surfaces 34 separated from the cores by 5-10 microns. For ease of sensor assembly and repeatability, the fibers are semi-permanently bonded together during the fiber manufacturing process by  
25 a thin layer of polyamide or other temperature-capable bonding adhesive material.

In FIG. 3 a specially shaped diaphragm 40 sensor tip is shown. The diaphragm 40 is sculptured and is a further improvement on the hat shaped diaphragm first disclosed in application Serial No. 08,390,970, now U.S. Pat.  
30 No. 5,600,070 incorporated herein by reference. The sculptured shape of the diaphragm 40 provides for increased light coupling between the delivering 42 and collecting 44 optical fibers mounted in the sensor body 46. The result is increased sensor sensitivity to diaphragm 40 deflection. As shown in FIG. 3

the inner diaphragm surface 48 is concave at the center of the diaphragm 40 to focus light emitted from the delivering fiber 42 as indicated by arrow 50 onto the collecting fiber 44 as indicated by arrow 52. By design the focus is best when there is no additional external pressure applied to the outside of the diaphragm 40.

Under optimized conditions, the curvature of the reflecting surface 48 is ellipsoidal to focus the light from the delivering fiber 42 onto the collecting fiber 44 with no external pressure applied. With the application of external pressure, the diaphragm 40 deflects and the ends of the delivering 42 and collecting 44 fibers are no longer at the foci 54 of the ellipsoidal curved reflecting surface 48 as shown in FIG. 4. As a result the collected light is diminished. The diaphragm 40 thickness is substantially retained by curving the outside thereof to generally match the inner curvature and thereby substantially maintain the diaphragm yield strength over the entire diaphragm.

The ellipsoidal curvature surface 48 and foci 54 locations are optimized for a given fiber size, core separation, and optical fiber numerical aperture. Although the ellipsoidal shape is optimum, more practical to manufacture parabolic or spherical surfaces for surface 48 may be substituted. FIG. 5 compares the response 56 of the sculptured diaphragm 40 to the response 58 of a substantially flat or regular diaphragm. Clearly the sculptured diaphragm sensor is significantly more sensitive to external pressure changes than a conventional flat diaphragm sensor.

Another aspect of the present invention comprises a novel design of the sensor electronic and opto-electronic circuitry for a dynamic pressure sensor, as shown in FIG. 6. The circuitry permits an increase in the operating temperature of the sensor and interface conditions module of up to a 150°C working temperature.

The new design uses one LED source and two photodiode detectors in contrast to previous single detector designs. A single detector design is adequate for a maximum electronics operating temperature of approximately 80°C, however, at a maximum operating temperature of 150°C the dark current of a PIN photodiode becomes so large as to dominate the total photodiode output.



At temperatures up to 80°C, the dark current of a typical photodiode is on the order of 1% of the total signal with 99% of the signal being proportional to the light delivered to the detector by the collecting fiber. But at 150°C the dark current increases more than three orders of magnitude and  
5 may represent as much as 500% of the photodiode signal that remains proportional to the light delivered to the detector. At such high levels of dark current the sensor calibration is significantly compromised.

To combat the dark current effect, the second photodiode is used for the purpose of providing a differentiating dark current input to a differential  
10 amplifier. In a preferred design disclosed below, the second diode is packaged inside a common enclosure with both photodiodes formed from the same silicon wafer, so their dark currents change identically with temperature changes. One photodiode is exposed to the light delivered by the collecting fiber while the second diode is covered so its output is only due to the dark  
15 current.

In FIG. 6 the current outputs from the photodiodes, one of which is the dark current correction, are combined at 60 to correct for the dark current output of the sensor. The voltage output therefrom is applied through the peak and hold circuit 62 and integrator 64 to the LED drive circuit 66 to  
20 thereby adjust the photonic output of the LED to the sensor. The voltage output is also passed through an inverting difference amplifier 68 and gain amplifier 70 to provide a suitable voltage range of output to the ECM of the engine.

One of the most difficult challenges in developing accurate  
25 combustion pressure sensors is the need to overcome the effect of temperature changes on the sensor's diaphragm. Under changing temperature, the diaphragm's Young's modulus and Poisson's number change resulting in increased deflection at elevated temperatures. Two types of temperature errors result: increased deflection due to increased average diaphragm temperature  
30 over many cylinder pressure cycles and the intra-cycle diaphragm temperature excursions. Disclosed below are compensation techniques that correct for both of the temperature change errors.

The short term, intra-cycle, error due to what is sometimes called thermal shock effect is compensated by virtually instantaneously reducing diaphragm reflectivity as the diaphragm temperature changes. In FIG. 7 a thin film 72 with a temperature-dependent co-efficient of reflectivity is deposited on the ellipsoidal surface 48 of the diaphragm 40 to cover the area illuminated by the delivery fiber 42.

The thin film 72 material is appropriately selected for a decreasing reflection co-efficient as the diaphragm deflection rate increases with temperature increases. The light intensity received by the collecting fiber 44 can be described by

$$V_{col}(p,T) = I \cdot C \cdot R(T) \cdot D(p,T),$$

where I is light intensity emerging from the delivering fiber 42, C is the collection efficiency dependent on fiber parameters and fiber to diaphragm distance but not dependent on diaphragm characteristics, R(T) is the reflection co-efficient of the diaphragm, and D(p,T) is the function describing diaphragm deflection as a function of pressure and temperature.

Through either thin film 72 light transmission or absorption dependence on temperature, the product of the reflection co-efficient R and deflection function D can be maintained independent of temperature if:

$$R(T) = D^{-1}(T)$$

In practice, R(T) may not be exactly an inverse of D but at least should approximate the inverse function.

At least two types of thin films 72 are suitable for temperature compensation as described above. In one type, a dielectric thin film with dichroic mirror-like characteristics is used. In this type reflection decreases with increased temperature due to the thermal expansion of the thin film material. In the alternative type, a semiconductor material such as Silicon or Gallium Arsenide is used. In this type the absorption co-efficient increases with increasing temperature. In either type of thin film 72 the film is deposited over the area illuminated by the delivering fiber 42, however, to minimize internal stresses in the film, the film area should be as small as possible as should the film thickness.

The temperature compensation technique described above does not correct for increased diaphragm deflection resulting from an increased average temperature of the diaphragm-sensor assembly over many pressure cycles. To correct for this type of error a compensation technique which relies on the electronic control of sensor gain is based on the output of a temperature probe mounted inside the sensor housing as shown schematically in FIG. 8. A temperature probe 74, such as a thermocouple, is mounted inside the sensor assembly in the sensor body 46 preferably as close as possible to the sensor diaphragm 40. A pair of wires 76 lead from the thermocouple 74 along side the optical fibers 42 and 44.

A schematic block diagram of the temperature-compensating optoelectronic circuitry for the sensor of FIG. 8 is shown in FIG. 9. Compared to the circuitry of a temperature uncompensated sensor, a thermocouple amplifier 78 receives input from the thermocouple 74 and outputs to the photodiode amplifier 80 to adjust the gain value of the photodiode amplifier. This is in contrast to a fixed gain photodiode amplifier used for an uncompensated sensor. The calibration co-efficients relating the sensor-gain to temperature change are obtained during an initial calibration and are uniquely assigned to each sensor when it is calibrated.

A number of innovative designs for a high accuracy static pressure sensor suitable for fuel pressure detection in a smart injector are disclosed below. The first design utilizes a two-fiber construction similar to what is shown in FIG. 3. The processing electronics differentiate between the dynamic and static sensors.

The difference between the sensor electronics is in the LED current control. While in a dynamic pressure sensor version the current is continuously adjusted based on the differential output of a minimum-maximum detector, in the static pressure sensor version the current is adjusted only during discrete periods of time when the injector is filled with fuel and the sensor is only exposed to atmospheric pressure. Suitable electronic circuitry is shown in FIG. 10, wherein when the LED current is adjusted the nominal light intensity is restored and any potential offset and gain drifts of the

sensor are corrected. The timing trigger 82 for the current reset is provided by the engine ECM to the LED level control at 84.

The second design of a static sensor uses three or four optic fibers, two detectors and one LED. One pair of optic fibers is used to detect diaphragm deflection as above and the other pair serves as a compensation device to correct for potential errors due to fiber bending, coupling efficiency changes between the LED and fibers, the temperature dependence of LED intensity or photodiode sensitivity, as well as diaphragm deflection temperature dependence.

10 In a temperature non-compensated version of the second design as shown in FIG. 11, both fiber pairs 86 and 88 are located with tips 90 and 92 in optical view of the reflecting surface 48 of the diaphragm 40. In FIG. 11 each pair 86 or 88 is embedded in its own ferrule 94 or 96. The ferrules 94 and 96 are spaced apart so that the tips 90 and 92 are approximately separated by 500 microns.

15 Alternatively, as shown in FIG. 12 both fiber pairs 86 and 88 are embedded in one, larger ferrule 98 and the separation between the tips 90 and 92 is formed by the center of the ferrule 100 and polishing the ferrule tip at an angle to provide a separation distance between the fiber pairs 86 and 88 of approximately 500 microns.

20 In both FIG. 11 and FIG. 12, the tip 90 of fiber pair 86 is spaced further from the reflecting surface 48 than the tip 92 of fiber pair 88. With this geometry the sensors of FIG. 11 and FIG. 12 make use of both slopes 104 and 106 of the two fiber sensor response curve of FIG. 13 where one fiber pair operates on the ascending part of the curve while the other fiber pair uses the descending part of the curve.

25 By appropriately locating the pairs 86 and 88 with the tips 90 and 92 at different distances from the diaphragm 40, the pairs are positioned to straddle the peak intensity 102. The maximum slope or sensor sensitivity occurs if the fiber tip 92 is positioned inside of the peak intensity 102 at about 250 microns. With the fiber pair tip 92 positioned on the first slope 104, the distance between the diaphragm 40 and the fiber pair tip decreases as pressure increases and the sensor output is caused to decrease.

If the second fiber pair tip 90 is positioned on the second slope 106 at approximately 600 microns the sensor output is caused to increase with pressure applied to the diaphragm 40. In what is sometimes called a "push-pull" effect, the sensor output is essentially a ratio of the two outputs from the pairs of fibers 86 and 88 resulting in increased sensor sensitivity to deflection compared to a sensor operated on one slope only with a single fiber optic pair.

In the processing scheme of FIG. 14 the light intensity detected by the reference pair tip 90 is maintained at a constant level by changing a LED driving current as illustrated in this block diagram. The sensor 46 output is proportioned to the light intensity detected by the measurement detector 108. Similar to the two fiber dynamic sensor above, the LED 110 light intensity is continuously adjusted by changing the current level to keep the reference photodiode 112 output at a constant level. As the light intensity is restored in the reference fiber pair 86, so is the light intensity in the measurement fiber pair 88 thereby compensating for any offset or gain errors of the sensor 46.

Alternatively, as shown in FIG. 15 the LED 110 current level is based on the sum 114 of the measurement detector 108 output and reference detector 112 output. In this configuration the zero relative pressure outputs of the two fiber pairs 86 and 88 are made equal by providing gain 116 to one output and summing 114 to provide current level control to the LED 110. If an environmental condition causes a light intensity change in the fiber pairs 86 and 88, both light intensities decrease or increase in the same direction and approximately the same amount. Thus, this light intensity change is directly corrected by changing the LED 110 light intensity.

By contrast, a relative pressure change applied to the sensor 46 will cause one output to increase and the other output to decrease having a net result of no change in the summing 114 of the outputs. The difference 118 of the two outputs passes through offset, filtering and gain 120 to provide the corrected sensor output. With the use of a sensor 46 also having a thermocouple therein, in addition to the two fiber pairs 86 and 88, correction

122 may be made for the average temperature of the sensor 46 and applied to the offset, filtering and gain 120 of the corrected sensor output.

In FIGs. 16 and 17 two additional versions of temperature-compensated static pressure sensors are described. The version in FIG. 16 is intended to compensate for intra-cycle, thermal shock related errors only. As above, one fiber pair 88 is exposed at its tip 124 for reflection of light off the thin film 72 to measure diaphragm 40 deflection. The other fiber pair 86 or reference pair is terminated by a non-deflecting reflector 126 with the surface covered by a temperature dependent thin film. The processing circuitry may be the same as disclosed in FIG. 14 above with the reference fiber pair 86 connected to photodiode 112. Depending on the application, both temperature dependent thin films 72 and on reflector 126 may be used or only on reflector 126.

In FIG. 17 the sensor 46 incorporates compensation for both short- and long-time constant temperature errors. The sensor 46 incorporates a combination of the temperature dependent reflectivity of the thin film 72 on the diaphragm 40 and the thin film on reflector 126 with the thermocouple temperature probe 74 all inside the sensor with the measurement fiber pair 88. As noted above, the thin films are used to compensate for the short time constant temperature change induced diaphragm deflection errors and the temperature probe is used to compensate for long time constant sensor average temperature errors. While the thin film correction is inherent in the temperature change induced reflectivity changes, the temperature probe correction is achieved through adjustment of the sensor opto-electronic control circuitry gain and offset as illustrated in FIG. 18.

The opto-electronic control circuitry of FIG. 18 is similar to the circuitry of FIG. 14, however, the thermocouple amplifier 78 and an Erasable Programmable Read Only Memory (EPROM) 128 are added. In addition to correcting for short- and long-time constant temperature changes, differing responses among fiber pairs arising from temperature changes can be countered. This non-identical response among fiber pairs may result in both sensor offset and sensor gain errors. The resistance of certain components in the circuitry may be adjusted to calibrate an individual sensor and thereby

compensate for the inherent differences among the fiber pairs. Alternatively, the EPROM 128 may be used to store and provide the electronic calibration values.

We Claim:

1. A fiber optic pressure sensor comprising a body, at least one pair of optical fibers mounted in the body, said pair of optical fibers terminating at tips, a diaphragm mounted on the body to form an enclosed  
5 volume with the body, said diaphragm having an underside facing the volume, and said tips in optical communication with the underside,  
at least a portion of the underside having a curved surface, said curved surface being reflective and juxtaposed to reflect light emitted from the tip of one fiber to the tip of the other fiber.
- 10 2. The sensor of claim 1 wherein the light reflected is maximized when the pressure differential across the diaphragm is a minimum.
3. The sensor of claim 1 wherein movement of the diaphragm toward the tips reduces the light received by the tip of the other fiber.
4. The sensor of claim 1 wherein the curved surface is  
15 ellipsoidal.
5. The sensor of claim 1 wherein the curved surface is spherical.
6. The sensor of claim 1 wherein a thin film is applied to the curved surface to provide the reflectivity, said thin film having a coefficient of reflectivity that decreases with increasing temperature.
- 20 7. The sensor of claim 1 wherein the pair of optical fibers are bonded together along a common interface with each optical fiber comprising a core and a cladding, the cladding being decreased in thickness at the interface.
8. The sensor of claim 1 including temperature sensing means  
25 mounted in the body.
9. The sensor of claim 1 including a second pair of optical fibers mounted in the body, said second pair of optical fibers terminating at tips, said tips in optical communication with a non-deflecting reflective surface.
10. The sensor of claim 1 including a second pair of optical fibers  
30 mounted in the body, said second pair of optical fibers terminating at a second pair of tips, said second pair of tips in optical communication with the volume at a distance from the reflective curved surface different from the tips of the one pair of optical fibers.



11. A fiber optic pair comprising two optical fibers each having a core and cladding, said optical fibers being bonded together along a common interface with the axes of the fibers in parallel relationship, and the cladding of each fiber being decreased in thickness at the interface.

5 12. An internal combustion engine fuel injector having a fuel chamber therein, a fiber optic fuel pressure sensor in the injector, said fiber optic fuel pressure sensor in communication with the fuel chamber.

13. The fuel injector of claim 12 wherein the sensor includes a diaphragm, the diaphragm being in communication with the fuel chamber.

10 14. An internal combustion engine fuel injector having a fuel chamber therein, a channel formed in the fuel-injector separate from the fuel chamber, said channel open to an engine combustion chamber upon installation of the injector and a fiber optic combustion pressure sensor in said channel.

15 15. The fuel injector of claim 14 wherein the combustion pressure sensor includes a diaphragm, the diaphragm being in communication with the channel and combustion chamber.

16 16. The fuel injector of claim 12 including a channel formed in the injector, said channel open to an engine combustion chamber upon installation of the injector and a fiber optic combustion pressure sensor in said channel.

17. The fuel injector of claims 12, 14 or 16 wherein at least one pressure sensor includes two pair of optical fibers, a diaphragm having an underside, a thin film applied to the underside to provide reflectivity, said thin film having a coefficient of reflectivity that decreases with increasing temperature, a reflective non-deflecting surface, said reflective non-deflecting surface having a coefficient of reflectivity that decreases with increasing temperature, one of said pair of optical fibers in optical communication with the diaphragm and the other of said pair of optical fibers in optical communication with the reflective non-deflecting surface.

18. The fuel injector of claim 17 including circuit means in opto-electronic communication with the pressure sensor having two pairs of optical fibers, said circuit means including means to inject light into one fiber of each

pair of optical fibers, means to detect light arriving from the other fiber of each pair of optical fibers and provide response thereto, means to combine the responses to the light detected from the other fibers and in response thereto to provide an output corrected for temperature changes in the pressure sensor having two pairs of optical fibers.

19. The fuel injector of claim 18 wherein said circuit means in response to the output corrected for temperature changes adjusts the means to inject light into one fiber of each pair.

20. The fuel injector of claims 12, 14 or 16 including temperature sensing means mounted in at least one pressure sensor,

circuit means in opto-electronic communication with the sensor having the temperature sensing means therein, said circuit means including means to inject light into the at least one pressure sensor, means to detect light arriving from the at least one pressure sensor and provide a response thereto and means to detect and respond to temperature induced changes in the temperature sensing means,

means to combine the responses to the light detected and temperature induced changes and in response thereto to provide an output corrected for the temperature induced changes.

21. The fuel injector of claim 20 wherein said circuit means in response to the output corrected for temperature induced changes adjusts the means to inject light into the at least one pressure sensor.

22. The fuel injector of claims 12, 14 or 16 including circuit means in opto-electronic communication with at least one pressure sensor, said circuit means including means to inject light into the at least one pressure sensor, means to detect light arriving from the at least one pressure sensor and provide a response thereto,

and means actuated by an external trigger to adjust the means to inject light into the at least one pressure sensor.

23. The fuel injector of claims 12, 14 and 16 wherein at least one pressure sensor includes two pairs of optical fibers and a diaphragm, both said pair of optical fibers having tips in optical reflective communication with the diaphragm,

the tip of one pair of optical fibers spaced from the diaphragm at a distance different from the tip of the other pair of optical fibers.

24. The fuel injector of claim 23 wherein each pair of optical fibers is mounted in a separate ferrule.

5 25. The fuel injector of claim 23 wherein both pairs of optical fibers are mounted in the same ferrule.

26. The fuel injector of claim 23 wherein the diaphragm has an underside, at least a portion of the underside comprising a reflective surface, whereby movement of the diaphragm nearer to both tips causes the light  
10 output of the nearest tip to the diaphragm to decrease and the light output of the furthest tip to increase.

27. The fuel injector of claim 26 including circuit means in opto-electronic communication with the at least one pressure sensor having two pairs of optical fibers, said circuit means including means to inject light into  
15 one fiber of each pair of optical fibers, means to detect light arriving from the other fiber of each pair of optical fibers and provide responses thereto,

whereby the response corresponding to the tip furthest from the diaphragm is caused to adjust the means to inject light into one fiber of each pair of optical fibers and the response corresponding to the tip nearest  
20 the diaphragm provides an output corrected by the response of the tip furthest from the diaphragm.

28. The fuel injector of claim 27 wherein the means to inject light is adjusted to provide a substantially constant response from the tip furthest from the diaphragm.

25 29. The fuel injector of claim 26 including circuit means in opto-electronic communication with the at least one pressure sensor having two pairs of optical fibers, said circuit means including means to inject light into one fiber of each pair of optical fibers, means to detect light arriving from the other fiber of each pair of optical fibers and provide responses thereto,  
30 summing means to combine the responses and adjust the means to inject light into one fiber of each pair of optical fibers and differencing means to combine the responses to provide a corrected output.

30. The fuel injector of claim 29 including temperature sensing means mounted in the at least one pressure sensor,

and means in said circuit means adapted to respond to temperature induced changes in the temperature sensing means and in  
5 response thereto to adjust the corrected output.

31. The fuel injector of claim 27 including means to programmably calibrate the responses among a plurality of optical fiber pairs.

FIG 1

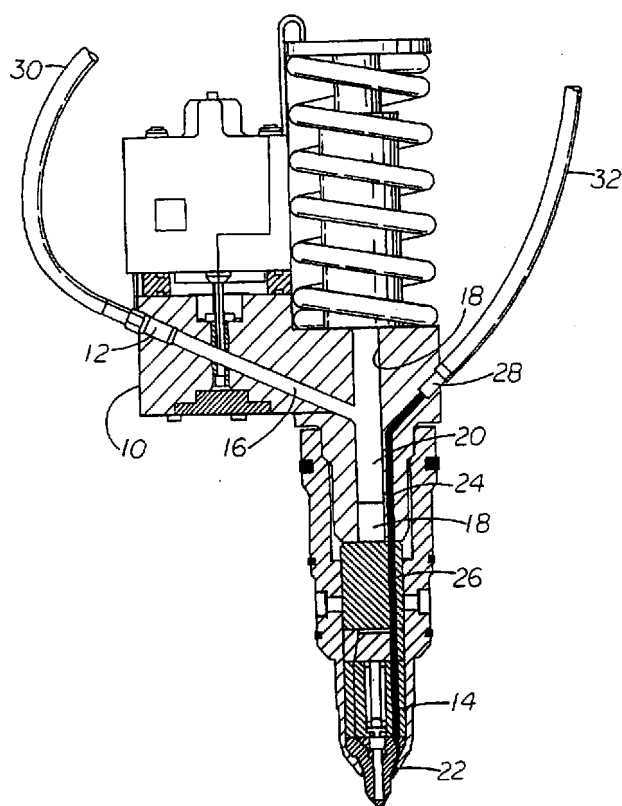


FIG 2




FIG 3

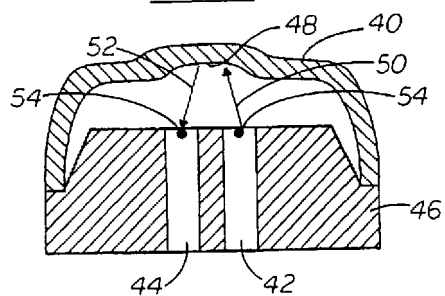
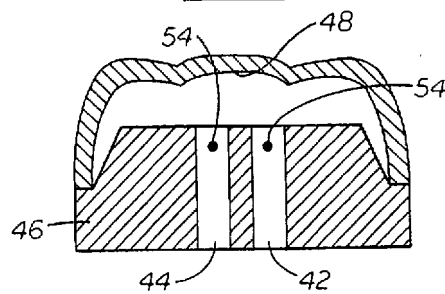


FIG 4







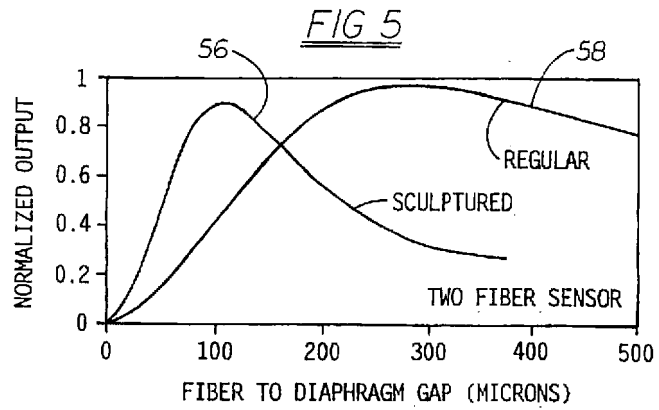


FIG 6

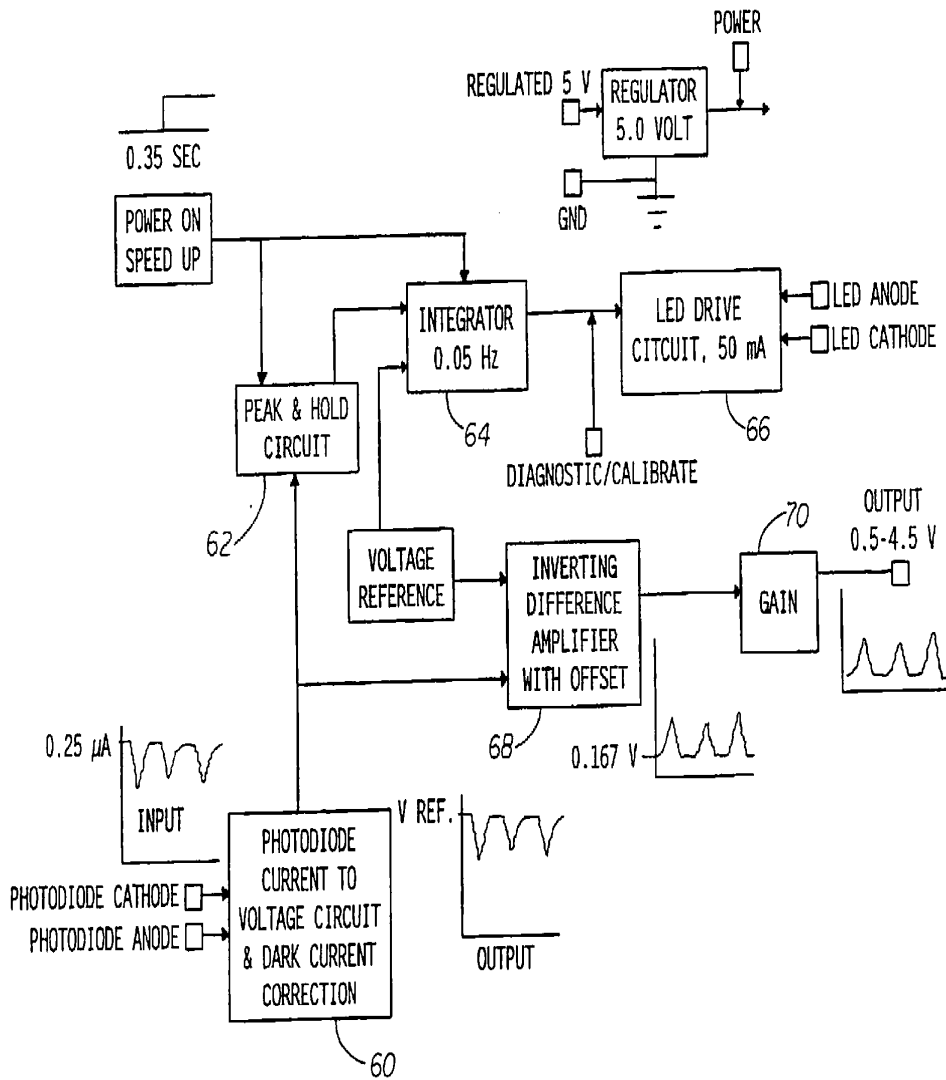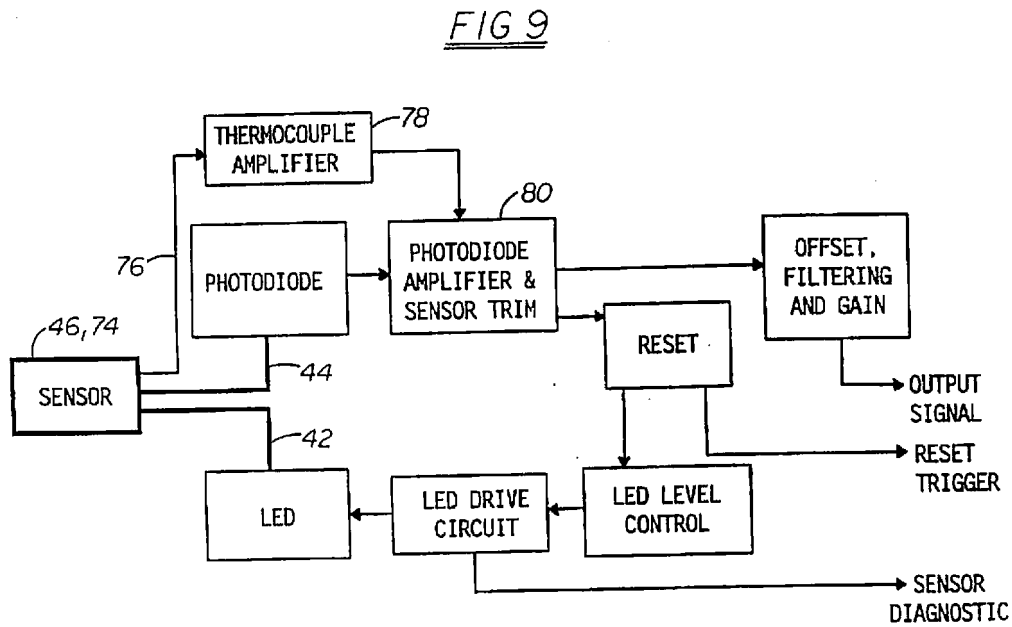

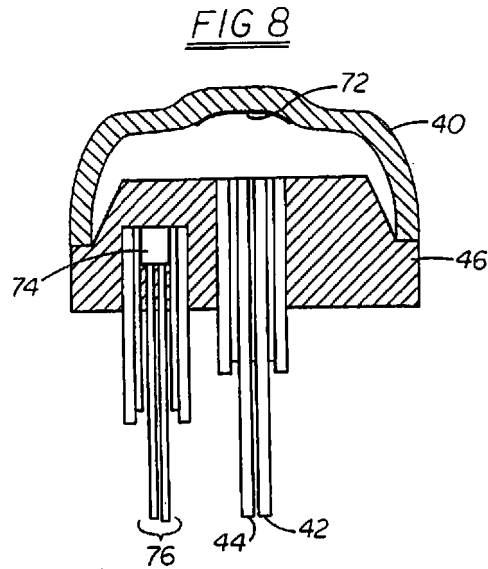

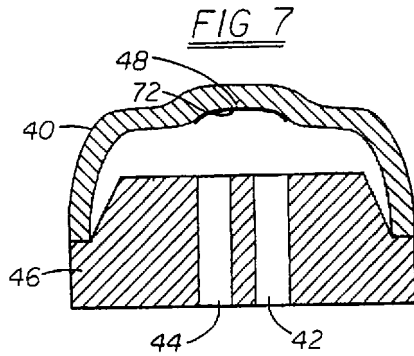

5/8



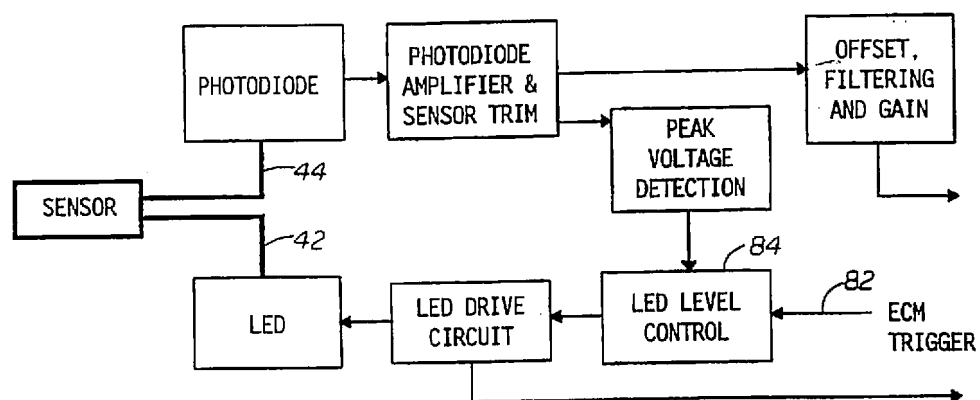
FIG 10FIG 11FIG 12






FIG 13FIG 14

FIG 15

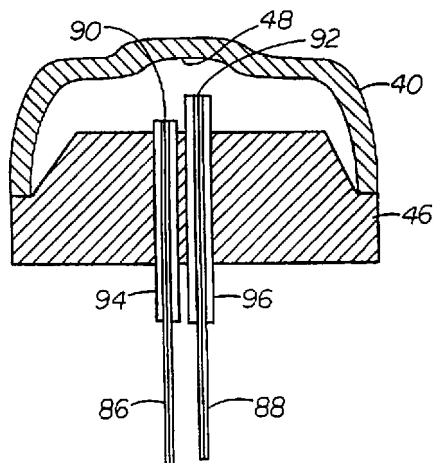

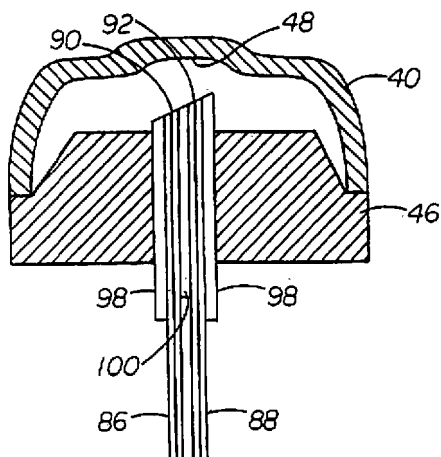

## INTERNATIONAL SEARCH REPORT

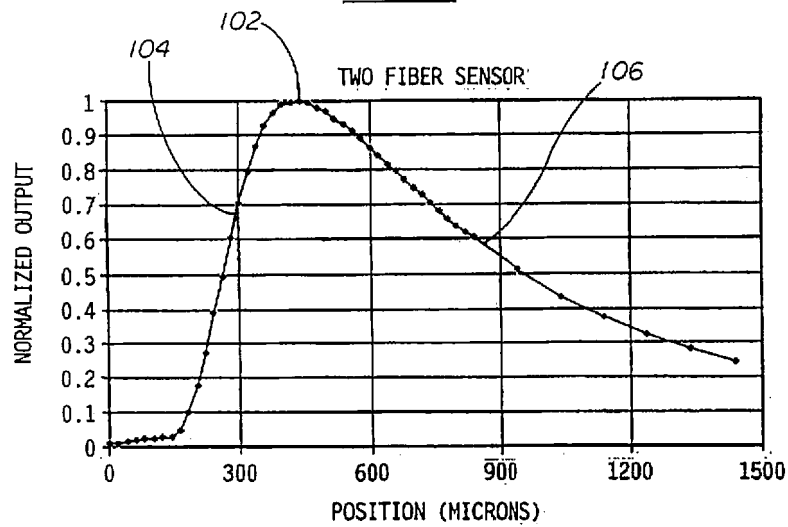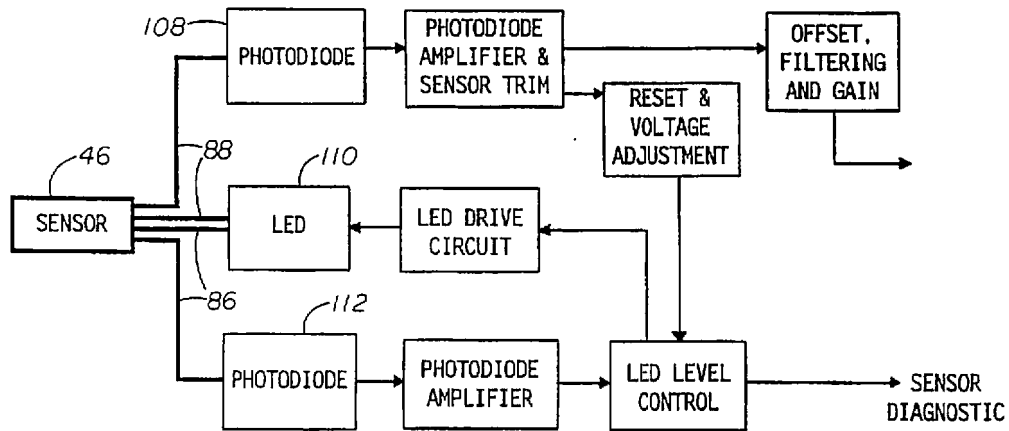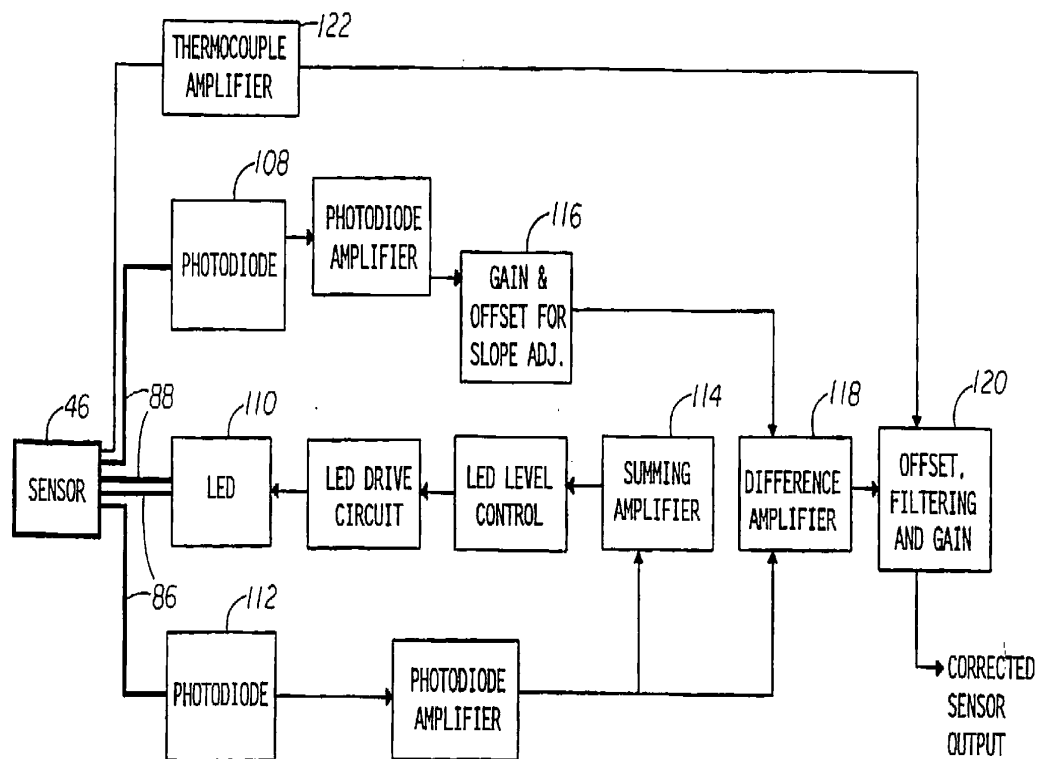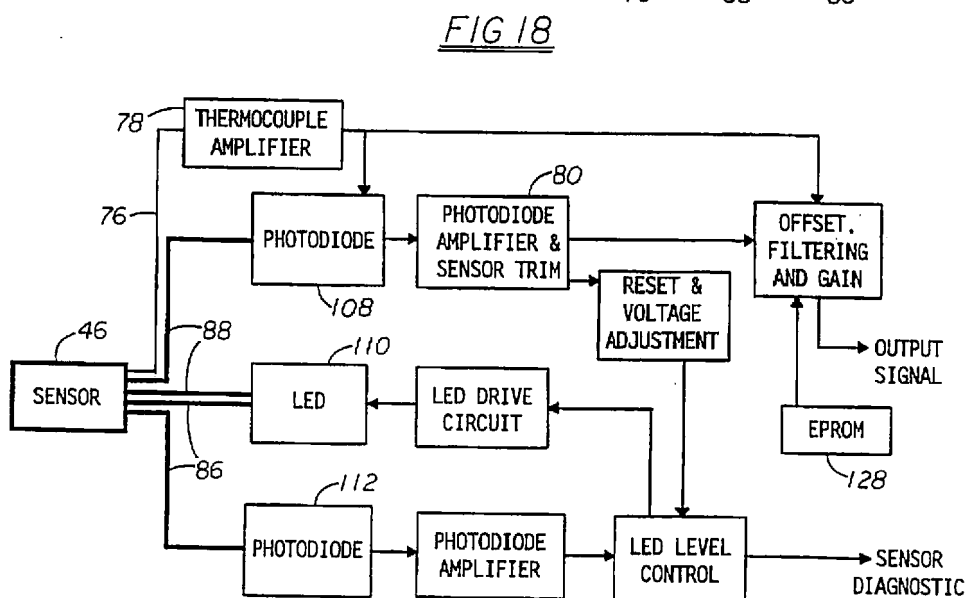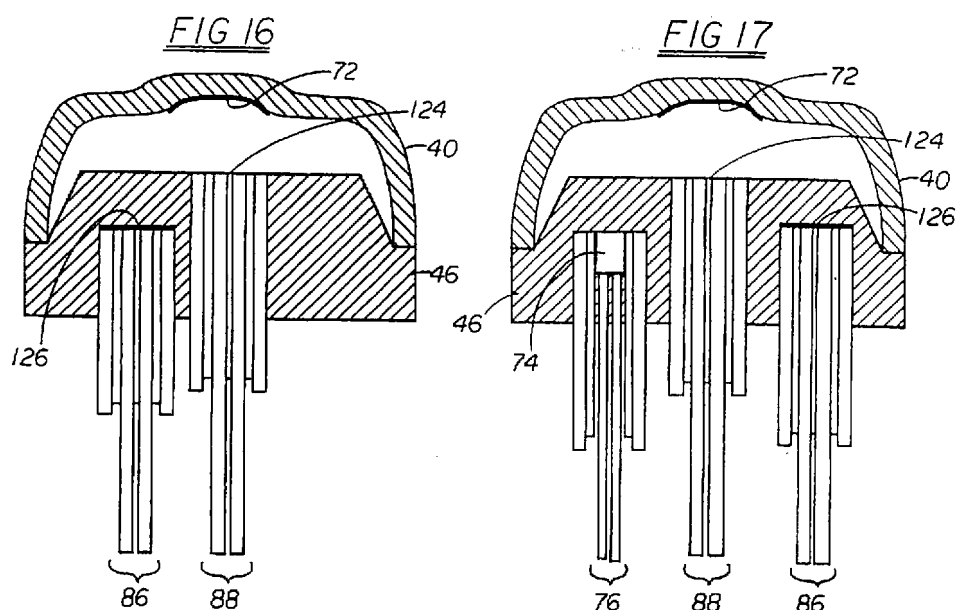International application No.  
PCT/US97/01942**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : G01J 1/56; G01B 9/02

US CL : 250/227.14, 231.19

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 250/227.14, 231.19, 227.17, 227.18, 227.19, 227.11, 231.1; 385/12, 13

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: fiber, fibre, pressure, fuel injector

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,452,087 A (TAYLOR ET AL) 19 September 1995, see entire document.	1-31

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

31 MARCH 1997

Date of mailing of the international search report

10 APR 1997

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer -

JOHN R. LEE

Telephone No. (703) 308-0956